

5600 SERIES

450 to 4,500 PSIG

How To Order

C 56 77 A - 12 BB - 450

VARIATION

- None - Inline
- C - Cartridge
- R - Right Angle
- MC - Manual Cartridge

BASIC MODEL NUMBER

5600 Series

O-RING MATERIAL & TEMPERATURE

- 77 - Buna N -65°F to +275°F
- 62 - Ethylene Propylene -65°F to +255°F
- 32 - Viton® -40°F to +275°F

Notes:

Series shown not for use with Skydrol. Consult factory for model numbers of relief valves for Skydrol applications.

Cracking Pressure is ±2% at 30 cc/min. flow.

Viton® is a registered trademark of DuPont Dow Elastomers.

Please consult your Circle Seal Controls Representative or our factory for information on special connections, operating pressures and temperature ranges.

CRACKING PRESSURE

Specify cracking pressure setting in PSIG. Range is 450 to 4300 PSIG.

450 - 450 PSIG

CONNECTIONS

- BB - Inline, MS33649
- Q - Cartridge Type
- RR - Right Angle, MS16142 (SAE)
- SS - Right Angle, Flange Fitting, MS3914

VALVE SIZE

Tube Sizes in 1/16"-Increments, except Cartridge Valve (Q).

12 - 3/4"

BODY MATERIAL

- A - 2024-T4/T351 Aluminum
- T - 303 Stainless Steel


Dimensions

INLINE 5600 SERIES

Dash No.	Size	Tube O.D. Nom.	Dimensions			
			A	B	C	D
4BB	1/4"	0.250	4.000	0.688	0.438	1.000
6BB	3/8"	0.375	5.000	0.813	0.500	1.000
8BB	1/2"	0.500	6.000	1.000	0.625	1.375
12BB	3/4"	0.750	7.000	1.375	1.705	1.375
16BB	1"	1.000	7.000	1.750	1.705	1.375
24BB	1-1/2"	1.500	7.000	2.250	1.705	1.500

The Inline Piloted Relief Valve envelope conforms to MS28893.

Dimensions in inches.

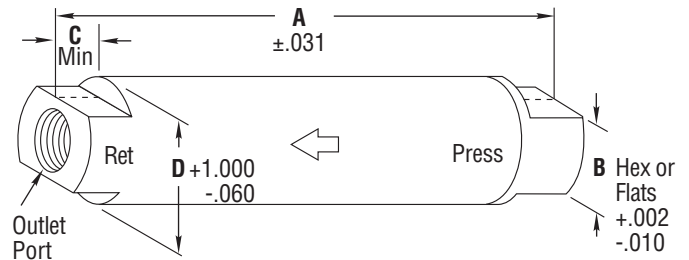


CARTRIDGE TYPE C5600 SERIES

Both a low and high flow cartridge valve have been developed for use in modular hydraulic systems. These standard units utilize the same internal parts as our inline valve. Order the 2Q size for flows up to 110 gallons per minute. Both the Aluminum and Stainless Steel housings contain Stainless Steel internal parts. Cracking pressures to 4300 psi.

Weight - Model No. 2Q

- Aluminum .29 lbs.
- Stainless Steel .65 lbs.



C5600 2Q

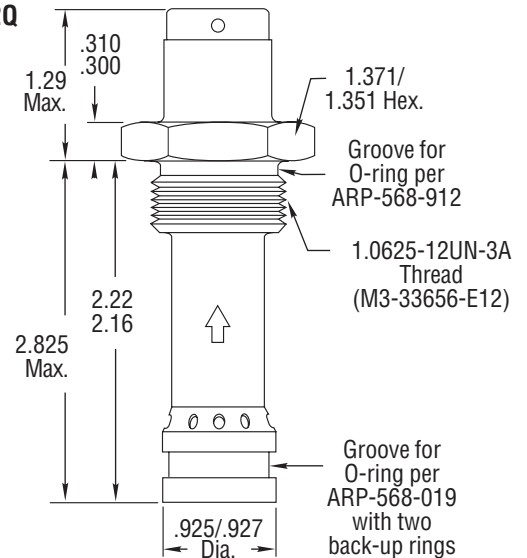

Manual Cartridge MC5600 Dimensions

The MC5600 is a user adjustable version of the basic product. It allows rapid prototyping of a hydraulic system for optimum performance. The “K” option provides a Hand Knob. The “F” option provides a Tamperproof Cover once the discrete setting has been applied to the system. The MC5600 is also available in the right angle configuration shown below.

ORDERING INFORMATION

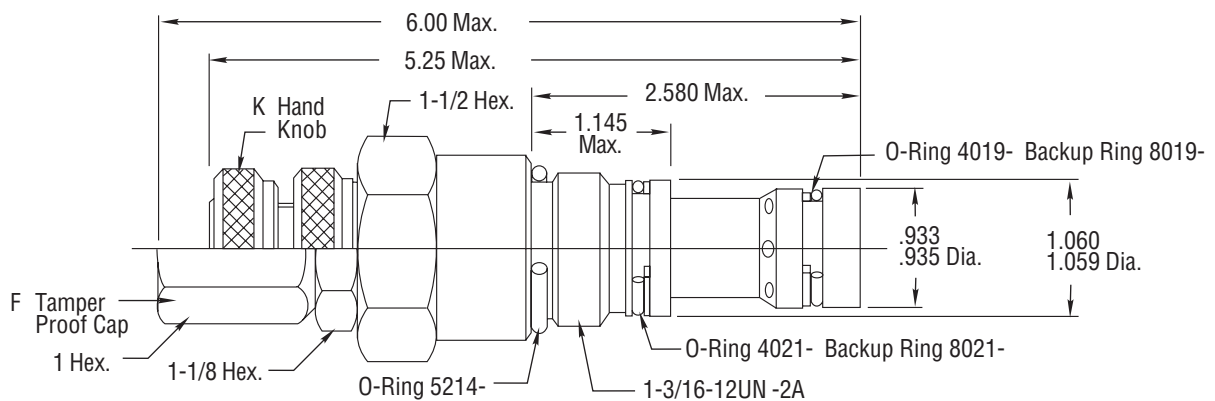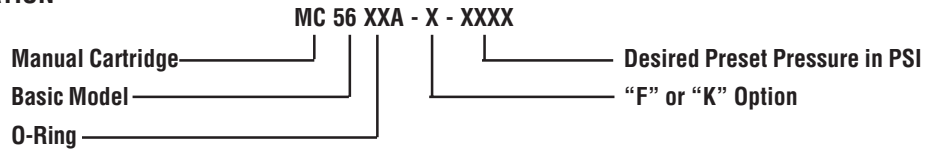


RIGHT ANGLE R5600 SERIES


Qualified to MIL-V-52687, standard C5600 Series Cartridge Valves can be mounted in right angle ported bodies. Straight tube threads are available in sizes 8 through 12 per MS16142, and in sizes 16 through 24 with flanges per MS39314 (military equivalents of SAE). When ordering QPL valves to requirements of MIL-V-52687, specify MIL-V-52687 in brackets underneath the part number.

For dimensional information on R5600 mounting bodies, consult factory.

**Right Angle R5600 SS
with Mounting Body**



**Right Angle R5600 RR
with Mounting Body**



Flow Data

MAXIMUM FLOWS TO MIL-V-52687


Cracking Pressure Setting 90°F	Maximum Rise To Rated Flow (PSI)	Maximum Decrease To Reset (PSI)	Maximum Decrease Of Setting @ 275°F	Rated Flow @ 90± 20°F (GPM)								
				4	6	8	10	12	16	20	24	2Q
450 - 774	40	25	35	3	4	12	20	32	48	60	60	60
775 - 1349	60	55	45	3	5	12	20	32	48	70	80	80
1350 - 2199	80	90	90	3	6	12	20	32	48	80	100	100
2200 - 4300	100	180	180	3	7	12	20	32	48	86	110	110

Special Project Valves for Unique Applications

Circle Seal Controls' engineers can analyze your special requirements when a standard valve cannot be fitted into your application. Examples are shown below of valves which are basically similar to the C5600 series but which require special bodies or other unique features.


P2-776 & P10-776 (Manned Aircraft)

The P2-776 was designed to replace a direct operating relief valve on an existing front line fighter aircraft handling 32 gallons per minute of MIL-H-5606 at 3750 PSI. A unit in a similar envelope, the P10-776 has successfully passed tests for a fighter program to flow 104 gallon per minute in the same size package.

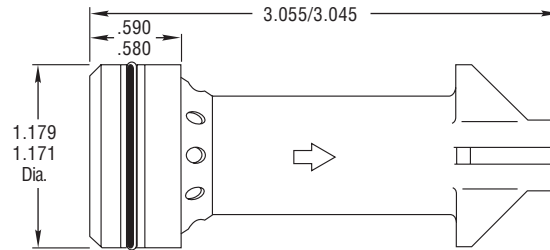


P12-776 (Manned Aircraft)

The P12-776 was designed specifically for fast response at high flow so that accumulators could be eliminated on a manned aircraft program. It achieves 32 gallons per minute flow in 5 mil sec. with a pressure drop of 3850 PSI.

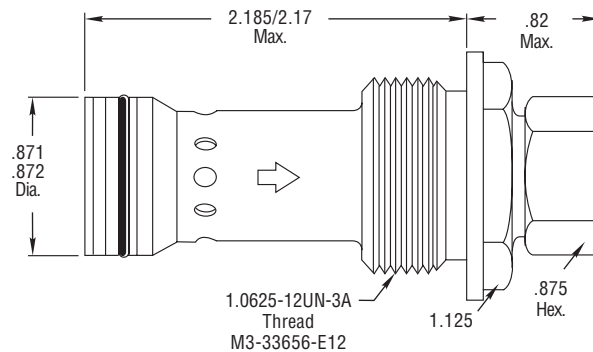


P16-776 (Special Mining Equipment)

The P16-776 was designed to flow 100 gallons per minute of water in hydraulic mining equipment. The valve itself is mounted on the end of a high pressure hose string. It vents overboard. The pressure rise over cracking pressure is only 120 PSI.

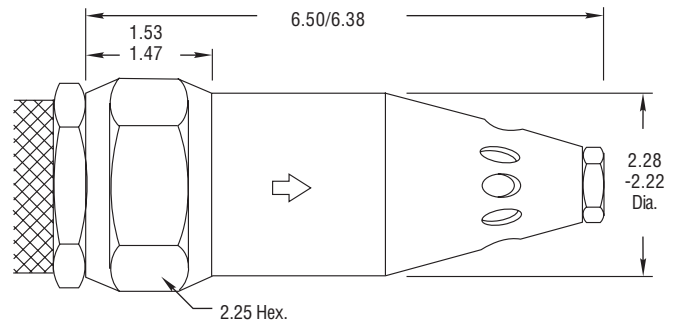

P15-776 (Rapid Firing Gun)

The P15-776 was developed for use on a hydraulically driven rapid firing cannon. It must be able to perform

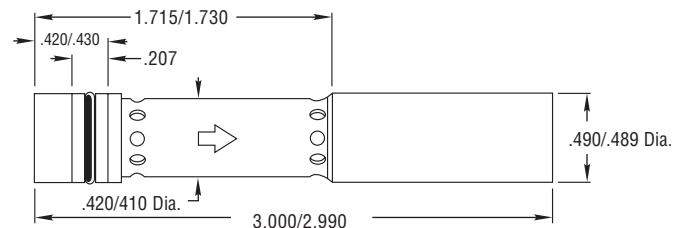

CIRCLE SEAL CONTROLS, INC.

A division of CIRCOR International, Inc.

Certified to ISO 9001